


DETAILS OF WINDOW WITH CASED FRAME & SLIDING SASHES

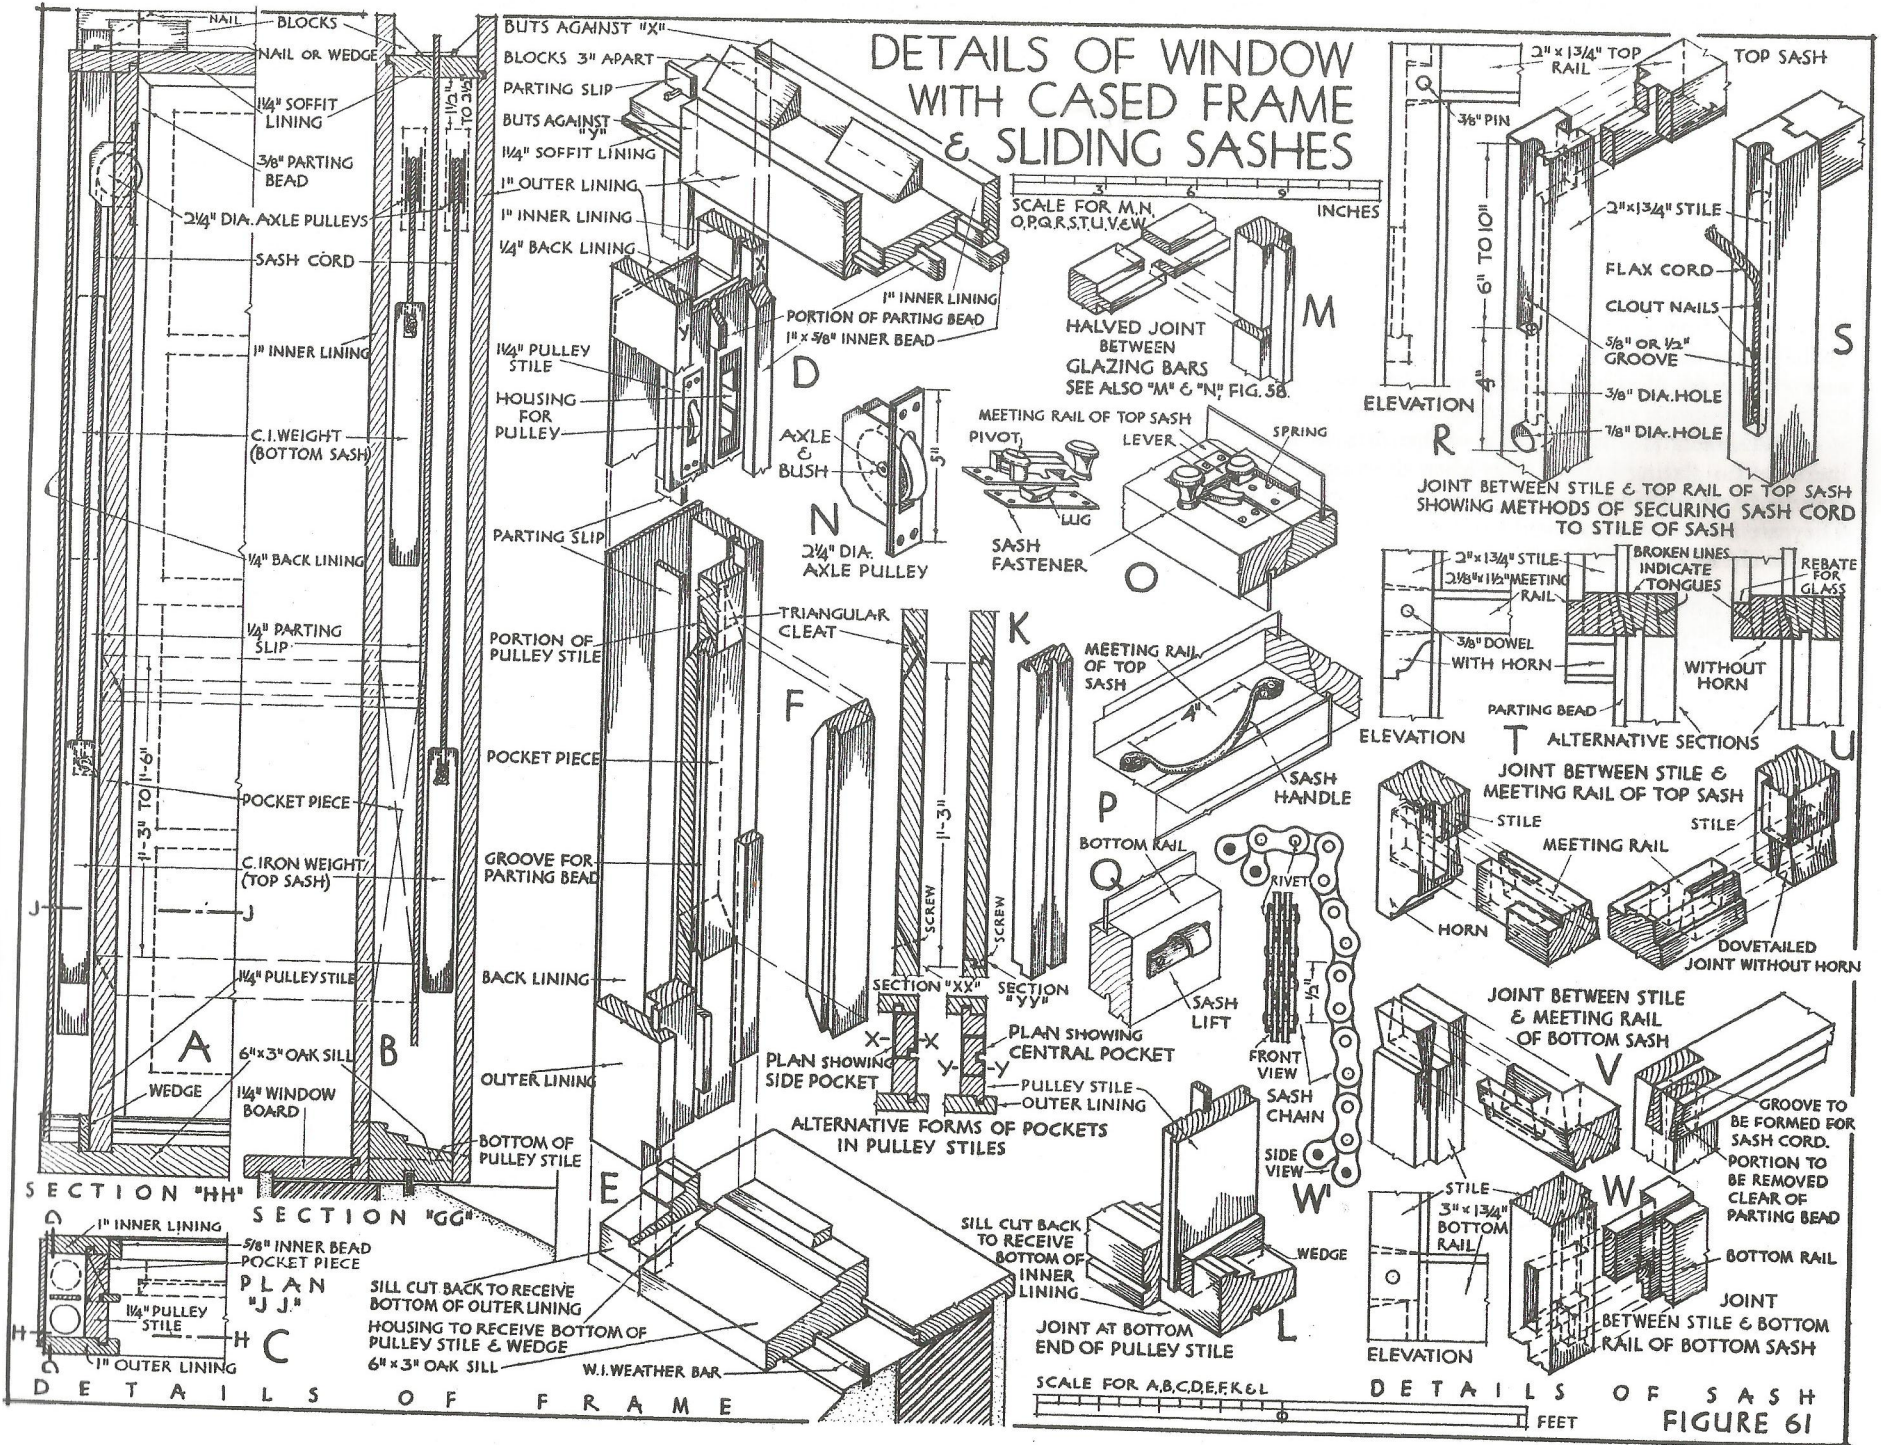

NAIL
 BLOCKS
 NAIL OR WEDGE
 1/4" SOFFIT LINING
 3/8" PARTING BEAD
 3/4" DIA. AXLE PULLEYS
 SASH CORD
 1" INNER LINING
 C.I. WEIGHT (BOTTOM SASH)
 1/4" BACK LINING
 1/2" PARTING SLIP
 POCKET PIECE
 POCKET PIECE
 C. IRON WEIGHT (TOP SASH)
 1/4" PULLEY STILE
 6" x 3" OAK SILL
 WEDGE
 1/4" WINDOW BOARD
 SECTION "HH"
 1" INNER LINING
 5/8" INNER BEAD
 POCKET PIECE
 1/4" PULLEY STILE
 1" OUTER LINING
 SECTION "GG"
 BUTS AGAINST "X"
 BLOCKS 3" APART
 PARTING SLIP
 BUTS AGAINST "Y"
 1/4" SOFFIT LINING
 1" OUTER LINING
 1" INNER LINING
 1/4" BACK LINING
 1/4" PULLEY STILE
 HOUSING FOR PULLEY
 PORTION OF PULLEY STILE
 TRIANGULAR CLEAT
 POCKET PIECE
 GROOVE FOR PARTING BEAD
 BACK LINING
 OUTER LINING
 BOTTOM OF PULLEY STILE
 SILL CUT BACK TO RECEIVE BOTTOM OF OUTER LINING
 HOUSING TO RECEIVE BOTTOM OF PULLEY STILE & WEDGE
 6" x 3" OAK SILL
 W.I. WEATHER BAR

BUTS AGAINST "X"
 BLOCKS 3" APART
 PARTING SLIP
 BUTS AGAINST "Y"
 1/4" SOFFIT LINING
 1" OUTER LINING
 1" INNER LINING
 1/4" BACK LINING
 1/4" PULLEY STILE
 HOUSING FOR PULLEY
 PORTION OF PULLEY STILE
 TRIANGULAR CLEAT
 POCKET PIECE
 GROOVE FOR PARTING BEAD
 BACK LINING
 OUTER LINING
 BOTTOM OF PULLEY STILE
 SECTION "XX"
 SECTION "YY"
 PLAN SHOWING SIDE POCKET
 PLAN SHOWING CENTRAL POCKET
 PULLEY STILE
 OUTER LINING
 ALTERNATIVE FORMS OF POCKETS IN PULLEY STILES
 SILL CUT BACK TO RECEIVE BOTTOM OF OUTER LINING
 HOUSING TO RECEIVE BOTTOM OF PULLEY STILE & WEDGE
 6" x 3" OAK SILL
 W.I. WEATHER BAR

SCALE FOR M,N,
 O,P,Q,R,S,T,U,V,W
 INCHES
 HALVED JOINT BETWEEN GLAZING BARS
 SEE ALSO "M" & "N", FIG. 58.
 MEETING RAIL OF TOP SASH
 PIVOT
 LEVER
 SPRING
 LUG
 SASH FASTENER
 AXLE & BUSH
 3/4" DIA. AXLE PULLEY

2" x 1 3/4" TOP RAIL
 3/8" PIN
 6" TO 10"
 2" x 1 3/4" STILE
 FLAX CORD
 CLOUT NAILS
 5/8" OR 1/2" GROOVE
 3/8" DIA. HOLE
 7/8" DIA. HOLE
 ELEVATION
 JOINT BETWEEN STILE & TOP RAIL OF TOP SASH
 SHOWING METHODS OF SECURING SASH CORD TO STILE OF SASH

BROKEN LINES INDICATE TONGUES
 REBATE FOR GLASS
 2" x 1 3/4" STILE
 3/8" x 1 1/2" MEETING RAIL
 3/8" DOWEL WITH HORN
 PARTING BEAD
 WITH HORN
 WITHOUT HORN
 ELEVATION
 T ALTERNATIVE SECTIONS
 JOINT BETWEEN STILE & MEETING RAIL OF TOP SASH
 STILE
 MEETING RAIL
 STILE
 HORN
 DOVETAILED JOINT WITHOUT HORN

MEETING RAIL OF TOP SASH
 SASH HANDLE
 P
 BOTTOM RAIL
 Q
 SASH LIFT
 RIVET
 FRONT VIEW
 SASH CHAIN
 SIDE VIEW
 W
 WEDGE
 L
 JOINT AT BOTTOM END OF PULLEY STILE
 SCALE FOR A,B,C,D,E,F,K & L
 FEET
 JOINT BETWEEN STILE & MEETING RAIL OF BOTTOM SASH
 STILE
 MEETING RAIL
 STILE
 GROOVE TO BE FORMED FOR SASH CORD. PORTION TO BE REMOVED CLEAR OF PARTING BEAD
 BOTTOM RAIL
 JOINT BETWEEN STILE & BOTTOM RAIL OF BOTTOM SASH
 ELEVATION
 STILE
 3" x 1 3/4" BOTTOM RAIL
 W
 BOTTOM RAIL

SECTION "HH"
 SECTION "GG"
 PLAN "JJ"
 SILL CUT BACK TO RECEIVE BOTTOM OF OUTER LINING
 HOUSING TO RECEIVE BOTTOM OF PULLEY STILE & WEDGE
 6" x 3" OAK SILL
 W.I. WEATHER BAR
 DETAILS OF FRAME

MEETING RAIL OF TOP SASH
 SASH HANDLE
 P
 BOTTOM RAIL
 Q
 SASH LIFT
 RIVET
 FRONT VIEW
 SASH CHAIN
 SIDE VIEW
 W
 WEDGE
 L
 JOINT AT BOTTOM END OF PULLEY STILE
 SCALE FOR A,B,C,D,E,F,K & L
 FEET
 JOINT BETWEEN STILE & MEETING RAIL OF BOTTOM SASH
 STILE
 MEETING RAIL
 STILE
 GROOVE TO BE FORMED FOR SASH CORD. PORTION TO BE REMOVED CLEAR OF PARTING BEAD
 BOTTOM RAIL
 JOINT BETWEEN STILE & BOTTOM RAIL OF BOTTOM SASH
 ELEVATION
 STILE
 3" x 1 3/4" BOTTOM RAIL
 W
 BOTTOM RAIL
 DETAILS OF SASH
 FIGURE 61