

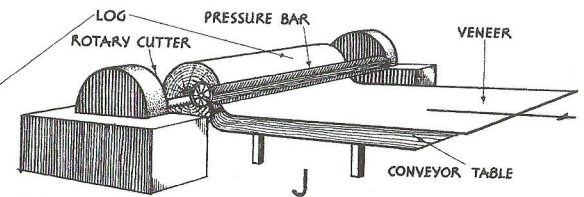
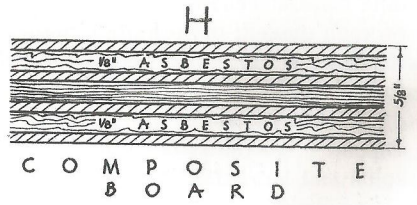
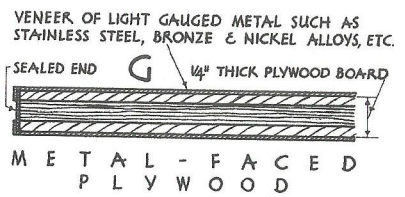
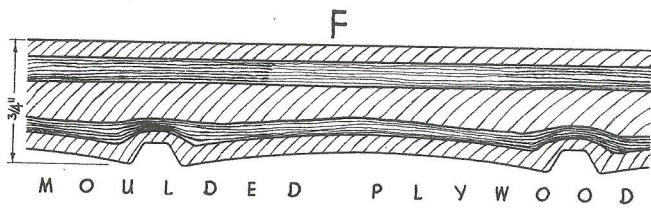
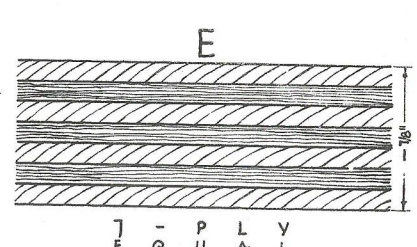


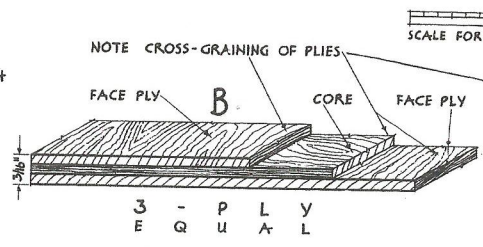


P L Y W O O D E T C

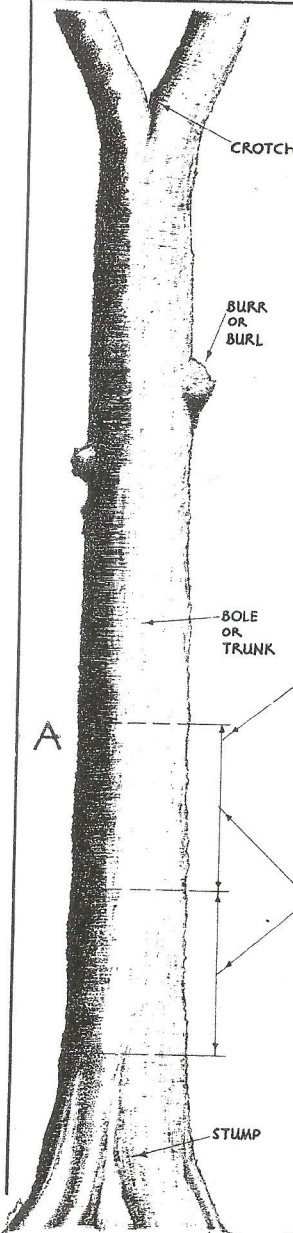


SKETCH SHOWING CONVERSION OF LOG INTO CONTINUOUS RIBBON OF VENEER

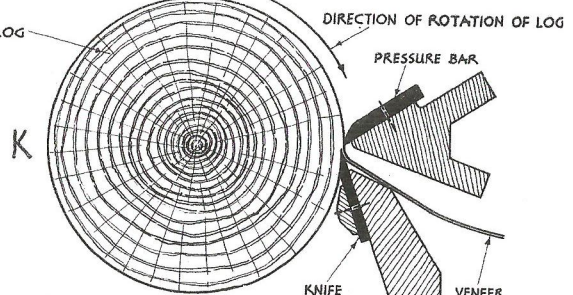

CROSS SECTION THROUGH LOG IN ROTARY CUTTER

SKETCH SHOWING PARTS OF TREE USED FOR THE CONVERSION OF PLYWOOD

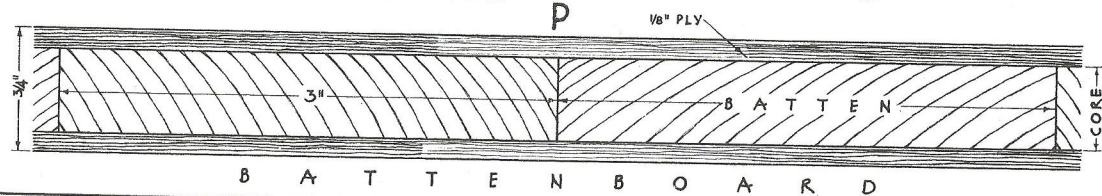

STANDARD SIZES OF PLYWOOD BOARDS

TIMBER	THICKNESS	NUMBER OF PLYS	LENGTH [INCHES]	WIDTH [INCHES]
DOUGLAS FIR (PSEUDOTSUGO TAXIFOLIA)	3/16, 1/4, 3/8, 1/2"	3	60, 66, 72,	12, 18, 24, 30,
	1/2", 5/8", 3/4"	5	84, 90, 96,	36, 42, 48, 54,
	7/8", 1", 1 1/8"	7	102, 108, 120,	60, 72, 84,
REDWOOD (PINUS SYLVESTRIS)	4 & 5 MM. 6 MM.	3 4	48, 50, 60, 72, 80, 84,	24, 36, 40, 48, 50, 60,
	9 MM. & UP	5 ETC.		
GABOON (ALCOUNEA- KLAINIANA)	3 TO 6 MM. 8 TO 16 MM. 19 TO 22 MM. 25 TO 30 MM.	3 5 7 9	60, 72, 84, 90, 96, 120,	36, 48, 60, 72, 84,
WALNUT (ENDIANDRA- PALMERSTONII)	3/16, 1/4, 3/8, 1/2" 3/8, 1/2, 5/8, 3/4" 5/8, 3/4"	3 5 7	72, 84, 96,	36, 48,

NOTE: 1 MILLIMETRE = 0.039"

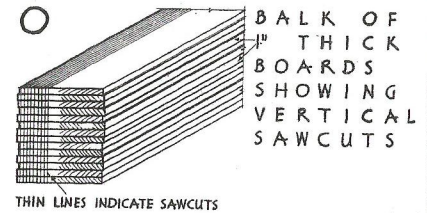
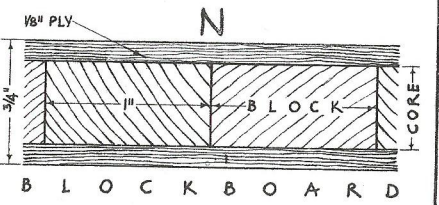
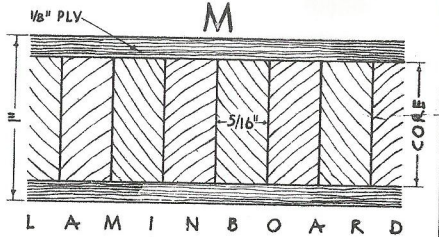


FIGURE 40