

**AQUAPANEL®**

# Rustproofed Screws

*For AQUAPANEL® Cement Board Outdoor*



AQUAPANEL® Rustproofed Screws have been specially developed for fixing AQUAPANEL® Cement Board Outdoor to timber substructures. The screw length L = 40 mm.

**Characteristics**

The screws are made from V2A stainless steel. The AQUAPANEL® Rustproofed Screw has a hilo thread which ensures optimum grip in timber substructures.

The screw also has milled ribs to the edge of the screw head, thereby ensuring that the screws can be screwed and countersunk.

The drive is TX20, to ensure easy screwing.

**Processing**

The screws are installed flush so that the screw heads are level with the plane of the board with screw spacing  $\leq 250$  mm. Note the spacing from the edges of minimum 15 mm. The use of screwdrivers with depth control is recommended.


**Coverage**

Wall: 15 screws/m<sup>2</sup>, stud spacing 60 cm  
25 screws/m<sup>2</sup>, stud spacing 30 cm  
Ceiling: 25 screws/m<sup>2</sup>, stud spacing 30 cm

**Method of delivery**

AQUAPANEL® Rustproofed Screw SN 40: 250 pcs/pack

Item code: 87197

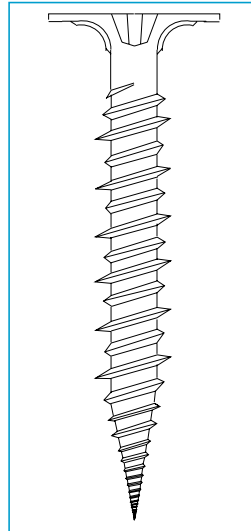

*Rustproofed Screws*